


Panasonic

Ex 2G / Splash Proof



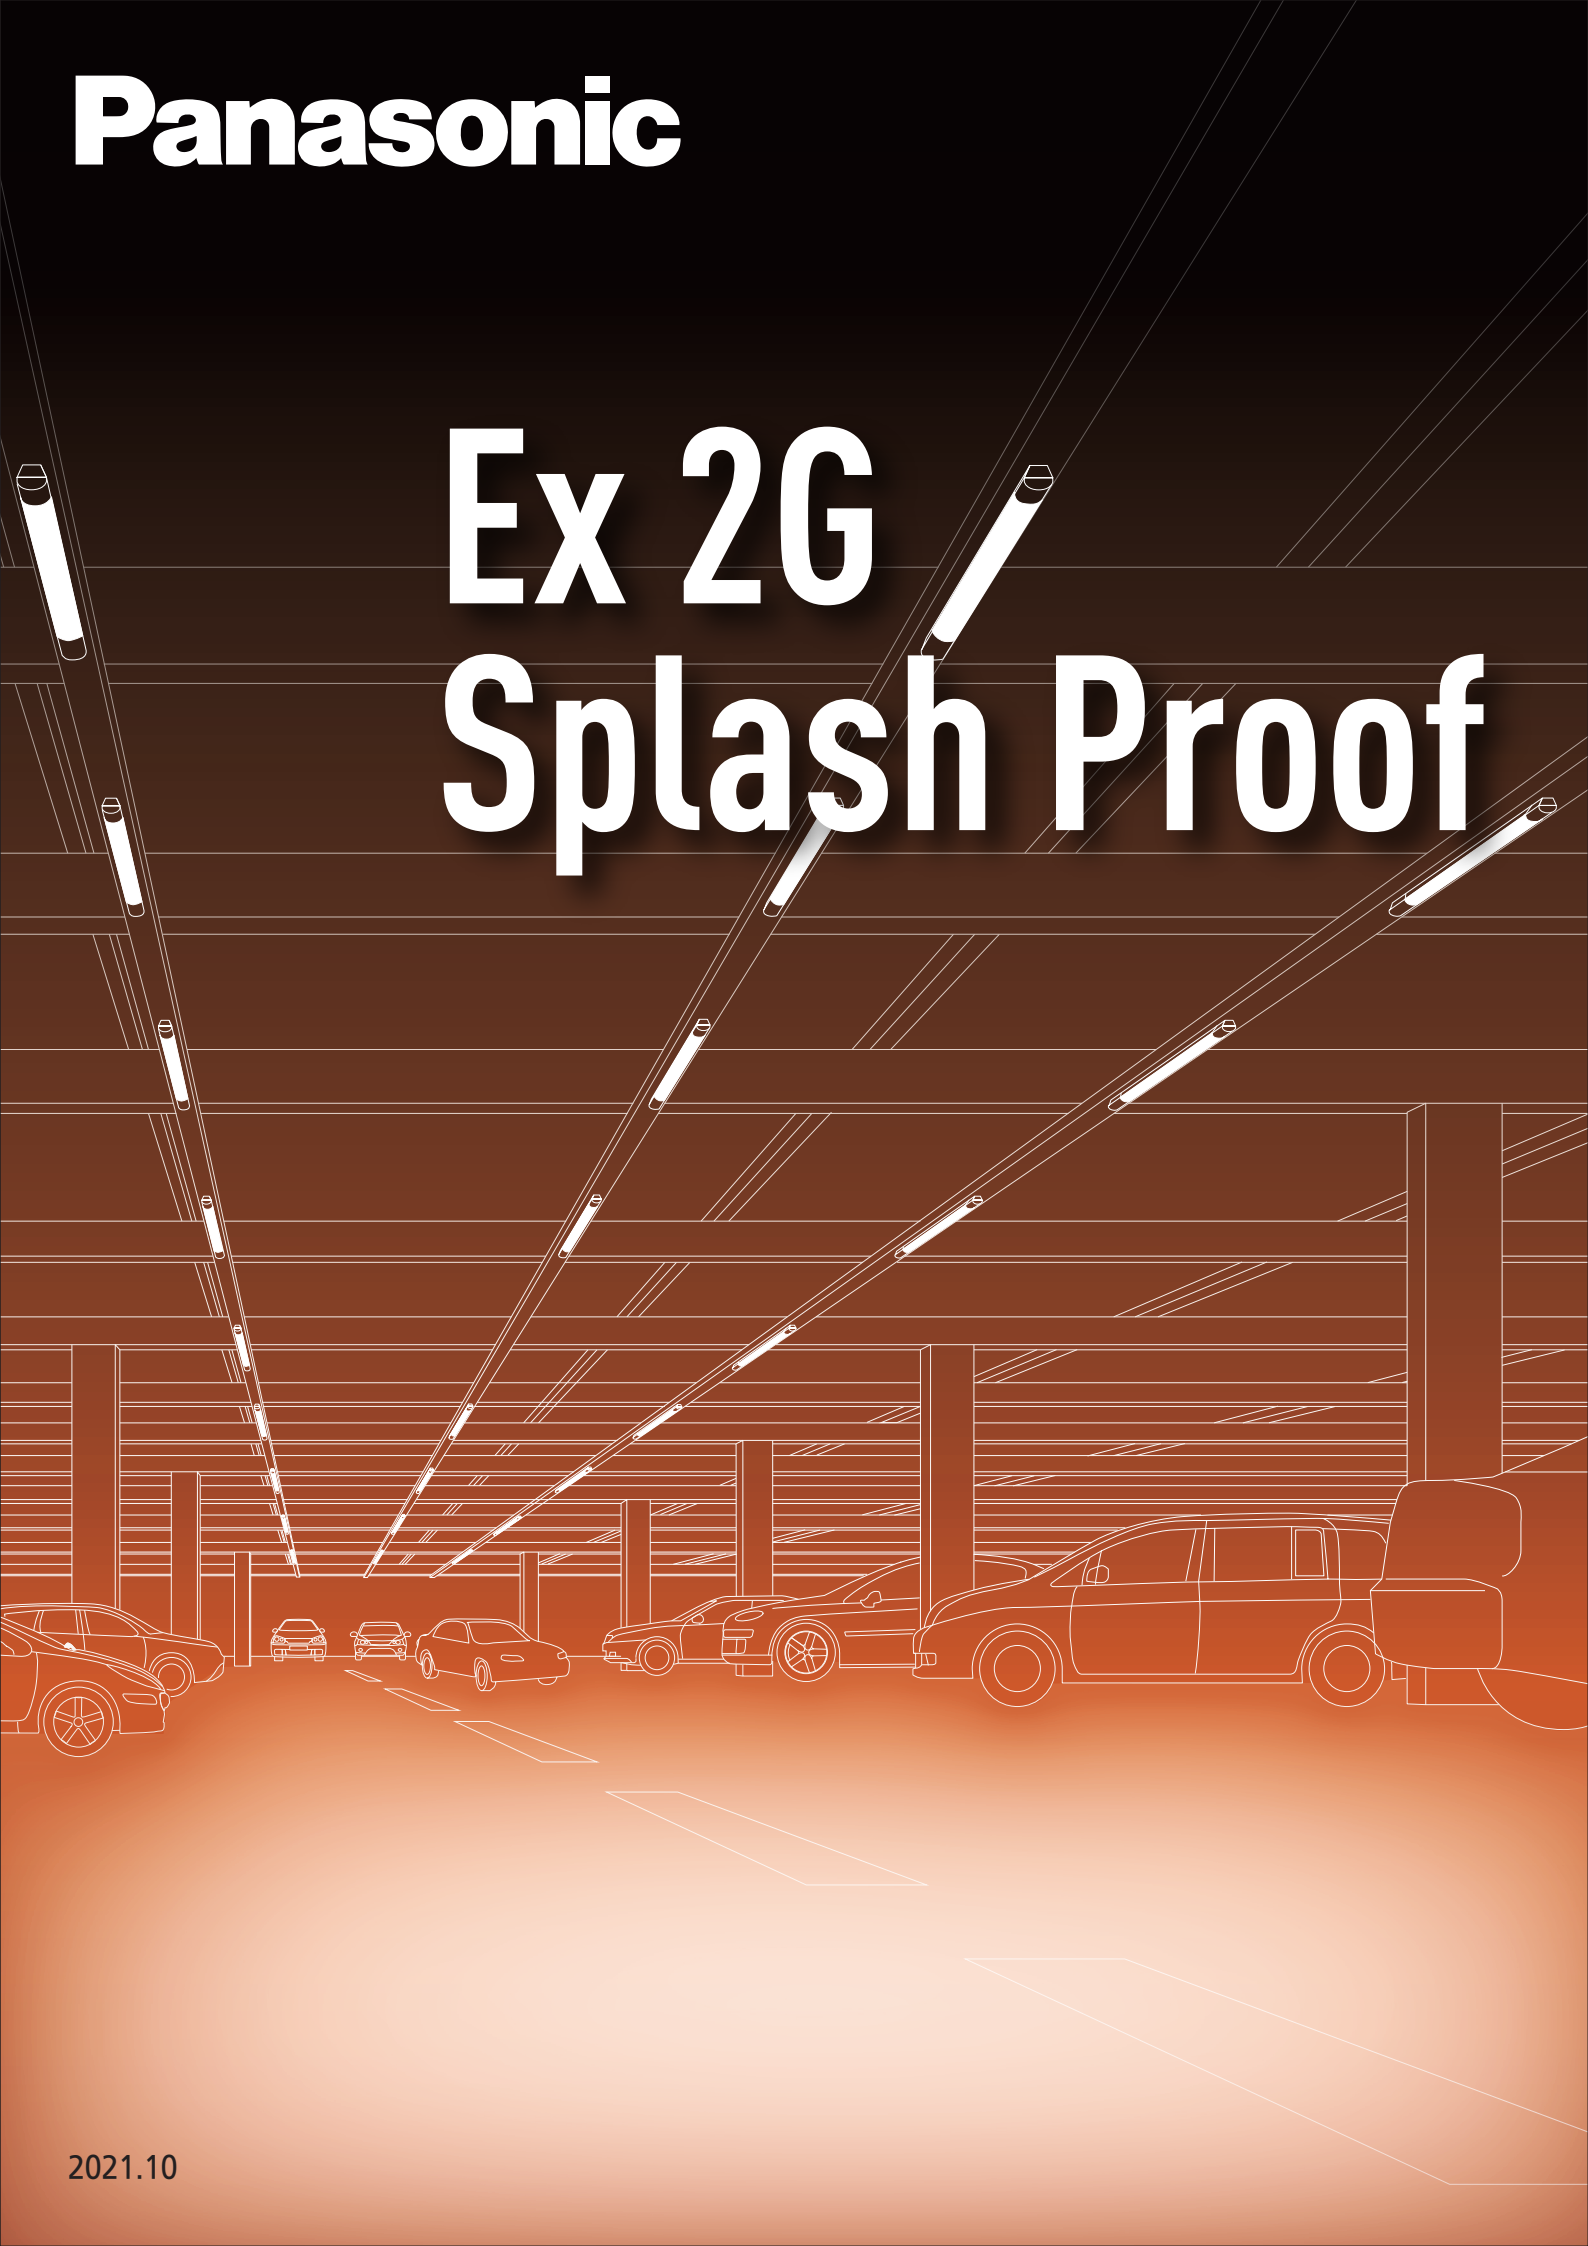

Ex 2G Splash Proof



Long Lifetime
50,000H




CRI
80



High Efficacy
128-144lm/W



IP Rating
IP65



Power Factor
0.9



Ambient Temperature
-20°C~40°C

Certification



RoHS

CISPR15



Series Lineup

Specification

Rated Voltage	200-240V
Frequency	50/60Hz
Lifetime	50,000 hours
CRI	80
Ambient Temperature	-20°C~40°C
Power Factor	0.9
Materials	Body: PC(White) Reflector: PC
IP Rating	IP65
Surge Protection	1kVA



Dimension

2FT




Size : 600×85×60mm
Weight : 1.2kg

4FT






Size : 1212×85×60mm
Weight : 2.4kg

5FT



Size : 1500×85×60mm
Weight : 3.6kg

Data

Type	2FT (600mm)	4FT (1212mm)	5FT (1500mm)	
Wattage	18W	36W	45W	
Non Dimming	4000K ●	NNFC4034088 2300lm, 128lm/W	NNFC4034188 4600lm, 128lm/W	NNFC4034288 6500lm, 144lm/W
	6500K ●	NNFC4039088 2300lm, 128lm/W	NNFC4039188 4600lm, 128lm/W	NNFC4039288 6500lm, 144lm/W
Photometric Distribution				

cd/klm (≒100%)

C0, C180

C90, C270

cd/klm (I=100%)
— C0, C180
— C90, C270

Panasonic Lighting - Product
Quality Testing



Learn more about Panasonic's
successful installations



Please contact

<https://panasonic.net/electricworks/lighting/>



Panasonic®

All Rights Reserved © 2021 COPYRIGHT Panasonic Corporation Electric Works Company