

Panasonic

**AG
Downlight 2G**




I Series Lineup

Specification


Rated Voltage	220-240V
Lifetime	50,000 hours
CRI	80
Ambient Temperature	5~35°C
Power Factor	0.95
IP Rating	IP20
Driver	Integrated
Material	Body: ADC(Black) Diffuser/Trim: PC(Frost)




Dimension

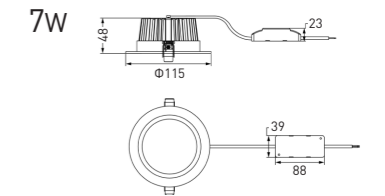


Size : $\Phi 115 \times 48 \text{mm}$
Cut out Size : 100mm
Weight : 0.31kg

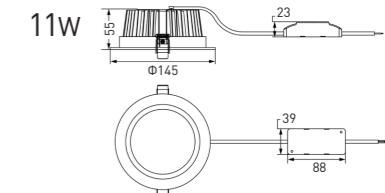

Size : $\Phi 145 \times 55 \text{mm}$
Cut out Size : 130mm
Weight : 0.5kg

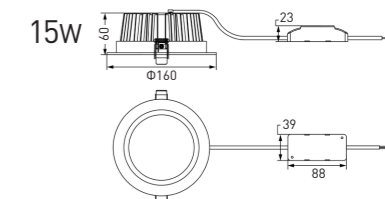

Size : $\Phi 160 \times 60 \text{mm}$
Cut out Size : 150mm
Weight : 0.49kg

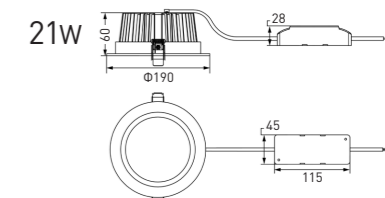

Size : $\Phi 190 \times 60 \text{mm}$
Cut out Size : 170mm
Weight : 0.68kg

AG Downlight 2G



Long Lifetime
50,000H




CRI
80



High Efficacy
84-90lm/W



Durability
Body: ADC(Black)



Power Factor
0.95

I Data

Wattage	7W	11W	15W	21W	
Non Dimming	3000K ●	NNV70301WE2A 585lm, 84lm/W	NNV70302WE2A 920lm, 84lm/W	NNV70303WE2A 1255lm, 84lm/W	NNV70304WE2A 1755lm, 84lm/W
	4000K ○	NNV70311WE2A 630lm, 90lm/W	NNV70312WE2A 990lm, 90lm/W	NNV70313WE2A 1350lm, 90lm/W	NNV70314WE2A 1890lm, 90lm/W
	6500K ●	NNV70351WE2A 630lm, 90lm/W	NNV70352WE2A 990lm, 90lm/W	NNV70353WE2A 1350lm, 90lm/W	NNV70354WE2A 1890lm, 90lm/W
Photometric Distribution					

cd/klm (±100%)
— C0, C180


Certification





RoHS



Panasonic Lighting - Product Quality Testing



Learn more about Panasonic's successful installations



Please contact

<https://panasonic.net/electricworks/lighting/>



Panasonic[®]

All Rights Reserved © 2022 COPYRIGHT Panasonic Corporation Electric Works Company