

Panasonic

AG Batten



AG Batten



Long Lifetime
50,000H




CRI
80



High Efficacy
140-142lm/W



Durability
Body: Aluminium



Power Factor
0.95

Certification



RoHS




I Series Lineup


Specification

Rated Voltage	220-240V
Frequency	50/60Hz
Lifetime	50,000 hours
CRI	80
Ambient Temperature	5°C-35°C
Power Factor	0.95
Materials	Body: Aluminium Reflector: PC
IP Rating	IP20

28W, 49W


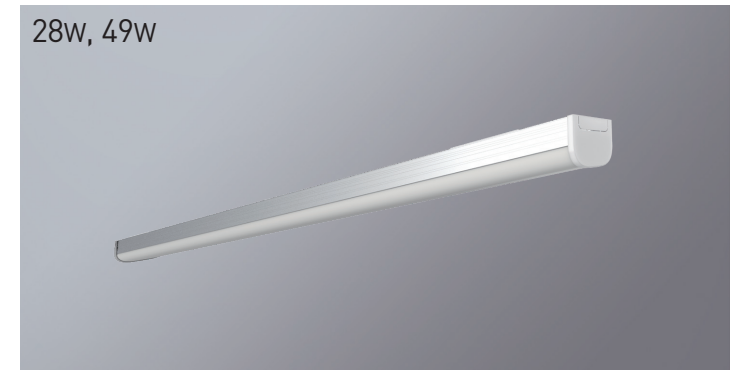


Dimension

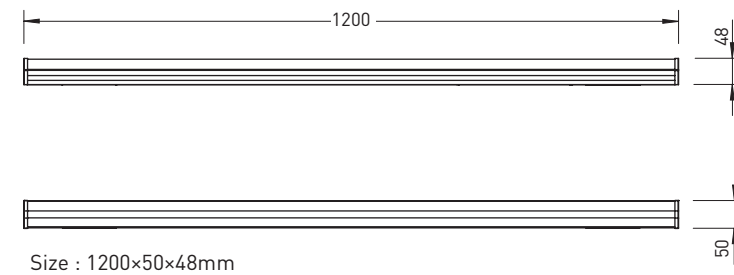

Size : 1200x50x48mm

I Data

Wattage	28W	49W
4000K ●	NFV30002WE 4000lm, 142lm/W	NFV30003WE 7000lm, 142lm/W
Non Dimming ○	NFV30012WE 4000lm, 142lm/W	NFV30013WE 7000lm, 142lm/W
6500K ●	NFV30052WE 4000lm, 142lm/W	NFV30053WE 7000lm, 142lm/W
Photometric Distribution		

cd/klm (l=100%)
 — C0, C180
 — C90, C270

Panasonic Lighting - Product Quality Testing



Learn more about Panasonic's successful installations



Please contact

<https://panasonic.net/electricworks/lighting/>



Panasonic[®]

All Rights Reserved © 2021 COPYRIGHT Panasonic Corporation Electric Works Company