

Panasonic

SP Street Light



SP Street Light



Long Lifetime
50,000H



Easy to Install
Only 1.4kg~4.2kg



High Efficacy
120-125lm/w



Surge Protection
10kVA



Wide Operational Voltage
100-277V



Durability
Tempered Glass



IP Rating
IP65
*IP66 - Customized

Certification




RoHS

CISPR15



SP Street Light






Specifications

Voltage	100 -240V
Frequency	50/60Hz
Lifetime	50,000 hours
CRI	70
Ambient Temperature	-20°C~50°C
Power Factor	0.9
Materials	Body: ADC12(Gray) Panel: Glass
IP rate	66
Surge Protection	10KV



Dimensions

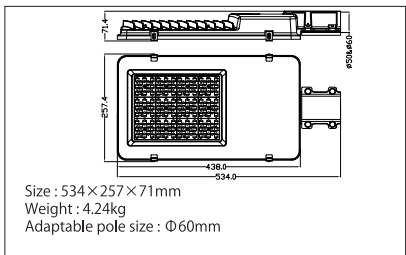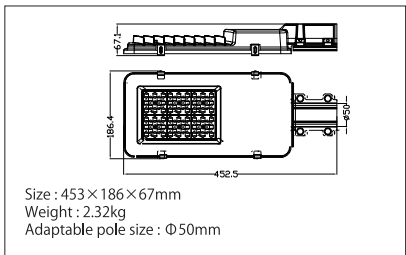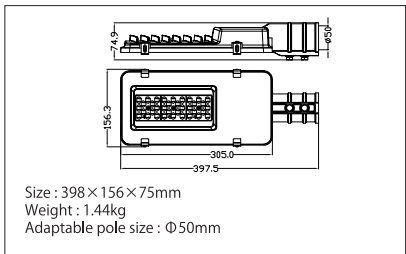

Outdoor

Street Light

Pedestrian

Flood Light

Wattage	30W	60W	90W	120W
Dimming Type	Non Dimmable	Non Dimmable	Non Dimmable	Non Dimmable
4000K ●	NNYC20051TH 3600lm,120lm/W	NNYC20052TH 7200lm,120lm/W	NNYC20053TH 10800lm,120lm/W	NNYC20054TH 14400lm,120lm/W
5700K ○	NNYC20061TH 3750lm,125lm/W	NNYC20062TH 7500lm,125lm/W	NNYC20063TH 11250lm,125lm/W	NNYC20064TH 15000lm,125lm/W
Photometric Distribution				

Panasonic Lighting - Product
Quality Testing



Learn more about Panasonic's
successful installations



Please contact

<https://panasonic.net/electricworks/lighting/>



Panasonic®

All Rights Reserved © 2021 COPYRIGHT Panasonic Corporation Electric Works Company